



工业产品简册

高压泵 - 电机 - 电动高压泵 - 锅炉 - 热水箱推车

MADE IN ITALY

PMD



黄铜头

最高压
200 Bar

流量 (lt/min)
50Hz 8.50 - 15.00
60Hz 10.20 - 18.00

最高进水温度
65°C

使用



PMD-CW



镀镍头 洗车

最高压
200 Bar

流量 (lt/min)
50Hz 8.50 - 15.00
60Hz 10.20 - 18.00

最高进水温度
65°C

使用



TPMD



镀镍头 热水

最高压
150 Bar

流量 (lt/min)
50Hz 8.50 - 15.00
60Hz 10.20 - 18.00

最高进水温度
85°C

使用



PMD-HY



黄铜头

最高压
200 Bar

流量 (lt/min)
8.00 - 14.00

最高进水温度
65°C

使用



PM-EDM-E3



黄铜头

最高压
200 Bar

流量 (lt/min)
8.50 - 13.00

最高进水温度
65°C

使用



PM-EDM-E4



黄铜头

最高压
200 Bar

流量 (lt/min)
8.50 - 15.00

最高进水温度
65°C

使用



MMD



黄铜头

最高压
250 Bar

流量 (lt/min)
50Hz 12.00 - 21.00
60Hz 14.40 - 25.20

最高进水温度 - °C
65°

使用



MMD-CW



镀镍头 洗车

最高压
250 Bar

流量 (lt/min)
50Hz 12.00 - 21.00
60Hz 14.40 - 25.20

最高进水温度
65°C

使用



TMM



镀镍头 热水

最高压
200 Bar

流量 (lt/min)
50Hz 12.00 - 21.00
60Hz 14.40 - 25.20

最高进水温度
85°C

使用



MMX



不锈钢头

热水

最高压
200 Bar

流量 (lt/min)
50Hz 12.00 - 21.00
60Hz 14.40 - 25.20

最高进水温度
85°C

使用



MMD-HY



黄铜头

最高压
250 Bar

流量 (lt/min)
12.00 - 21.00

最高进水温度
65°C

使用



MMD-EDM-E4



黄铜头

最高压
275 Bar

流量 (lt/min)
13.50 - 20.90

最高进水温度
65°

使用



GM

黄铜头



电



最高压
300 Bar

流量 (lt/min)
50Hz 18.00 - 63.00
60Hz 21.60 - 75.60

最高进水温度
65° C

使用



GM-CW

镀镍头

洗车



电



最高压
300 Bar

流量 (lt/min)
50Hz 18.00 - 63.00
60Hz 21.60 - 75.60

最高进水温度
65° C

使用



TGM

镀镍头

热水



电



最高压
200 Bar

流量 (lt/min)
50Hz 18.00 - 63.00
60Hz 21.60 - 75.60

最高进水温度
85° C

使用



GMX

不锈钢头

热水



电



最高压
200 Bar

流量 (lt/min)
50Hz 18.00 - 63.00
60Hz 21.60 - 75.60

最高进水温度
85° C

使用



XM

黄铜头



电



最高压
500 Bar

流量 (lt/min)
50Hz 11.00 - 21.00
60Hz 13.20 - 25.20

最高进水温度
65° C

使用



LM

铸铁头



电



最高压
280 Bar

流量 (lt/min)
50Hz 45.00 - 120.00
60Hz 40.00 - 80.00

最高进水温度
65° C

使用



LMX

不锈钢头



电



最高压
500 Bar

流量 (lt/min)
50Hz 20.00 - 30.00
60Hz 29.00 - 41.00

最高进水温度
65° C

使用



电机

MEC 100



性能

单相电: 83%
三相: 85%

泵配对

PMD MMD

伏	相	HP(Kw)	RPM
110	1	3 (2.2)	1740 (60Hz)
220	1	3 (2.2)	1740 (60Hz)
230	1	3 (2.2)	1450 (50Hz) 1740 (60Hz)
230/400	3	5.5 (4)	1450 (50Hz) 1740 (60Hz)

MEC 112



性能

单相电: 82%
三相: 86% - 88%

泵配对

PMD MMD

伏	相	HP(Kw)	RPM
230	1	4 (3)	1450 (50Hz) 1740 (60Hz)
230/400	3	5.5 (4)	1450 (50Hz) 1740 (60Hz)
230/400	3	7.5 (5.5)	1450 (50Hz) 1740 (60Hz)

MEC 132



性能

10 (7.6) V: 89%
15 (11) V: 88% - 90.4%

泵配对

MMD GM
XM

伏	相	HP(Kw)	RPM
230/400	3	10 (7.5)	1450 (50Hz) 1740 (60Hz)
230/400	3	15 (11)	1450 (50Hz) 1740 (60Hz)
400/700	3	15 (11)	1450 (50Hz) 1740 (60Hz)

MEC 160



性能

90.6%

泵配对

GM XM LM

伏	相	HP(Kw)	RPM
400/700	3	20 (15)	1450 (50Hz) 1740 (60Hz)

MEC 180



性能

92.3%

泵配对

GM XM LM

伏	相	HP(Kw)	RPM
400/700	3	30 (22)	1450 (50Hz) 1740 (60Hz)

可逆液压马达驱动泵 - 电动泵

直接连接



流量	压力	HP(Kw)
15	170	5.3 (3.95)
15	200	6.25 (4.66)
21	200	8.75 (6.52)

结合弹性联轴器



流量	压力	HP(Kw)
15	200	6.25 (4.66)
21	200	8.75 (6.52)
25	200	15.6 (11.63)
15	500	19 (14)

带弹性联轴器, 溢流阀, 安全阀, 热力阀和压力表



流量	压力	HP(Kw)
15	200	6.25 (4.66)
21	200	8.75 (6.52)
54	150	25.6 (19.1)



MAZZONI高压泵
有弹性联轴器的马达 +
电控盒 +
TST 溢流阀 +
压力表

流量	压力	HP(Kw)	马达
10	150	3 (2.2)	230V (50) 1Ph
13	170	5.5 (4)	400V (50) 3Ph
15	150	5.5 (4)	400V (50) 3Ph
15	200	7.5 (5.5)	400V (50) 3Ph
21	150	7.5 (5.5)	400V (50) 3Ph
21	200	10 (7.5)	400V (50) 3Ph
25	240	15 (11)	400V (50) 3Ph
30	200	15 (11)	400V (50) 3Ph



MAZZONI高压泵
有弹性联轴器的马达 +
底盖

流量	压力	HP(Kw)	马达
10	125	3 (2.2)	230V (50) 1Ph
13	170	5.5 (4)	400V (50) 3Ph
15	200	7.5 (5.5)	400V (50) 3Ph
15	500	20 (15)	400V (50) 3Ph
21	150	7.5 (5.5)	400V (50) 3Ph
21	200	10 (7.5)	400V (50) 3Ph
21	500	30 (22)	400V (50) 3Ph
25	240	15 (11)	400V (50) 3Ph
30	200	15 (11)	400V (50) 3Ph
43	170	20 (15)	400V (50) 3Ph
90	130	30 (22)	400V (50) 3Ph

柴油锅炉

小型柴油热水器



流量

15 lt/min

最高压

250 Bar

电源供应

柴油

性能

50.000 Kcal/h > 58.15 Kw

带电控盒的柴油锅炉

可选带电控盒

中型热水器



流量

21 lt/min

最高压

500 Bar

电源供应

柴油

性能

80.000 Kcal/h > 93 Kw

带电控盒的柴油锅炉x

可选带电控盒

中型热水器



流量

25 lt/min

最高压

500 Bar

电源供应

柴油

性能

90.000 Kcal/h > 1055 Kw

带电控盒的柴油锅炉

可选带电控盒

大型热水器



流量

30 lt/min

最高压

500 Bar

电源供应

柴油

性能

110.000 Kcal/h > 128 Kw

带电控盒的柴油锅炉

可选带电控盒

超大型热水器



流量

40 lt/min

最高压

500 Bar

电源供应

柴油

性能

135.000 Kcal/h > 157 Kw

带电控盒的柴油锅炉

可选带电控盒

天然气锅炉



流量

15 - 21 - 30 lt/min

最高压

250 Bar

电源供应

液化石油气热水器
天然气热水器水器

性能

55.000 Kcal/h > 63 Kw
96.000 Kcal/h > 112 Kw
117.000 Kcal/h > 134 Kw

电锅炉



流量

12 - 13 lt/min

最高压

6 Bar

电源供应

电

最高出口温度

85° C

热水箱推车

15 - 21 - 25 升



最高压

250 - 350 Bar

流量

15 - 21 - 25 lt/min

最高进水温度

150° C

电源供应

柴油

30 升



最高压

500 Bar

流量


30 lt/min

最高进水温度

150°

电源供应

柴油

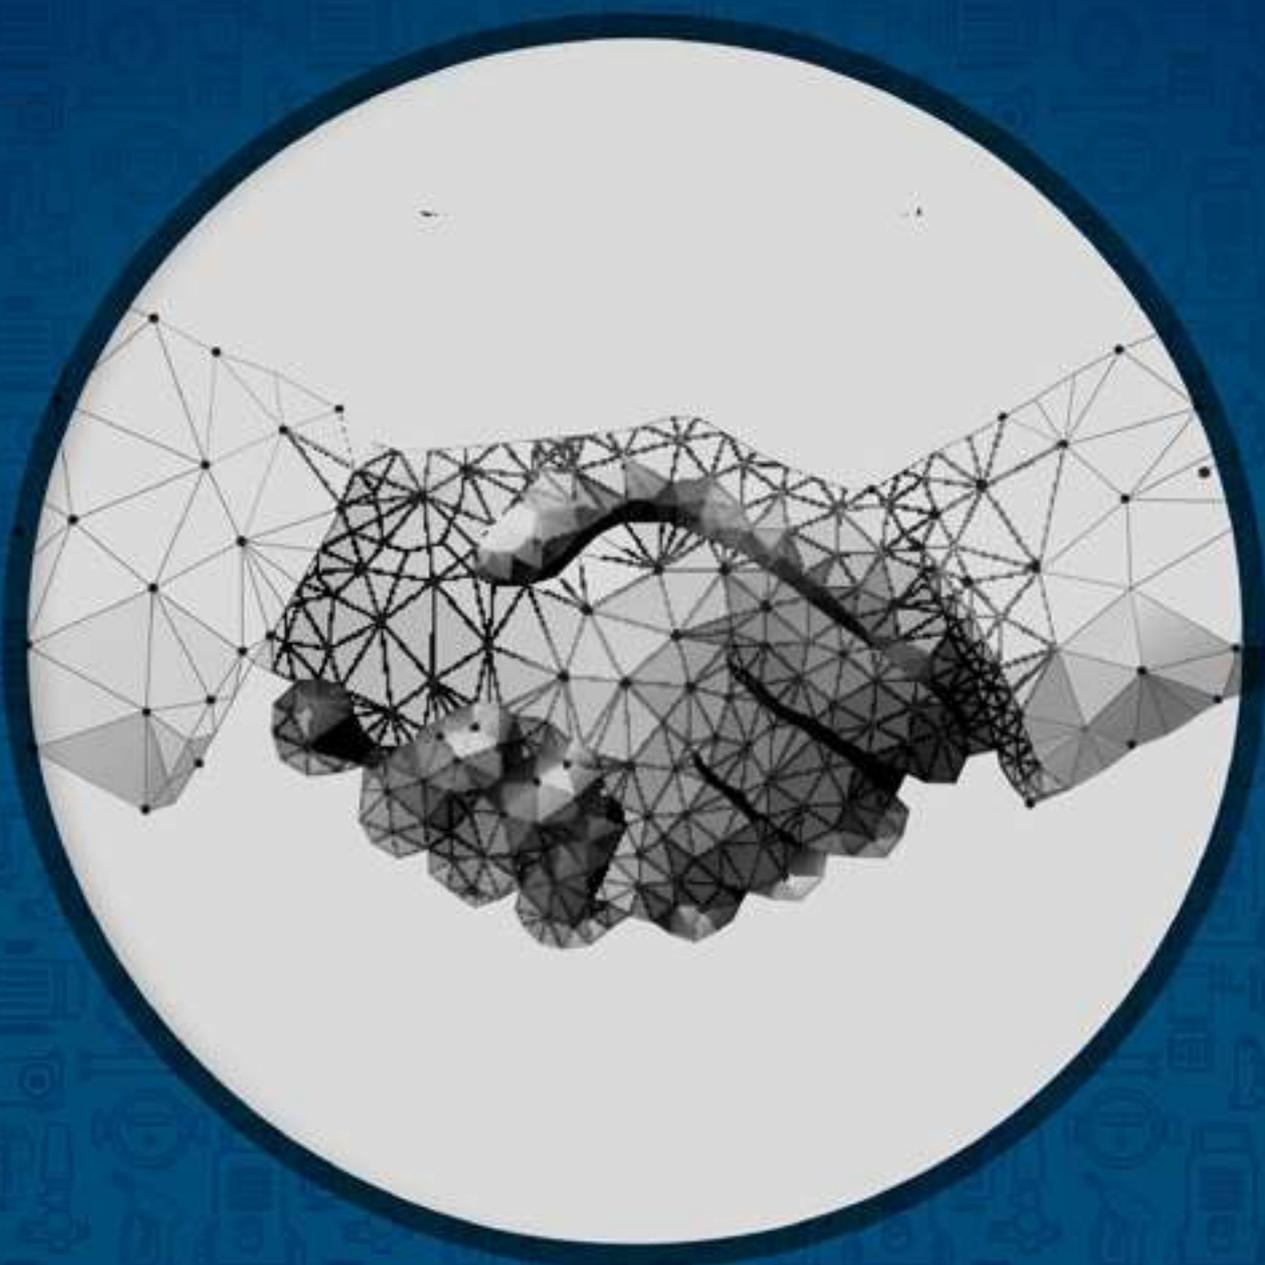

关注我们

WeChat



☎ (+86) 13162359663

☎ (+39) 351 677 1750

✉ chinadesk@e-mazzoni.it

🌐 mazzoni.com.cn



扫一扫
与我们联系!

